
Drg No. QDF7S

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.250	133.4
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.433	11.0
CROWN WHEEL SPIGOT DIA	D2	4.3755	111.1
BEARING DIA	D3	2.251	57.2
BEARING DISTANCE	L1	4.500	114.3
SPIGOT LENGTH	L2	0.690	17.5
	L2/A	0.690	17.5
OVERALL LENGTH	L3	5.880	149.4
BEARING/CROWN WHEEL	L4	0.350	8.9
BORE	D4	1.201	30.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		18	
PITCH		16/32 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

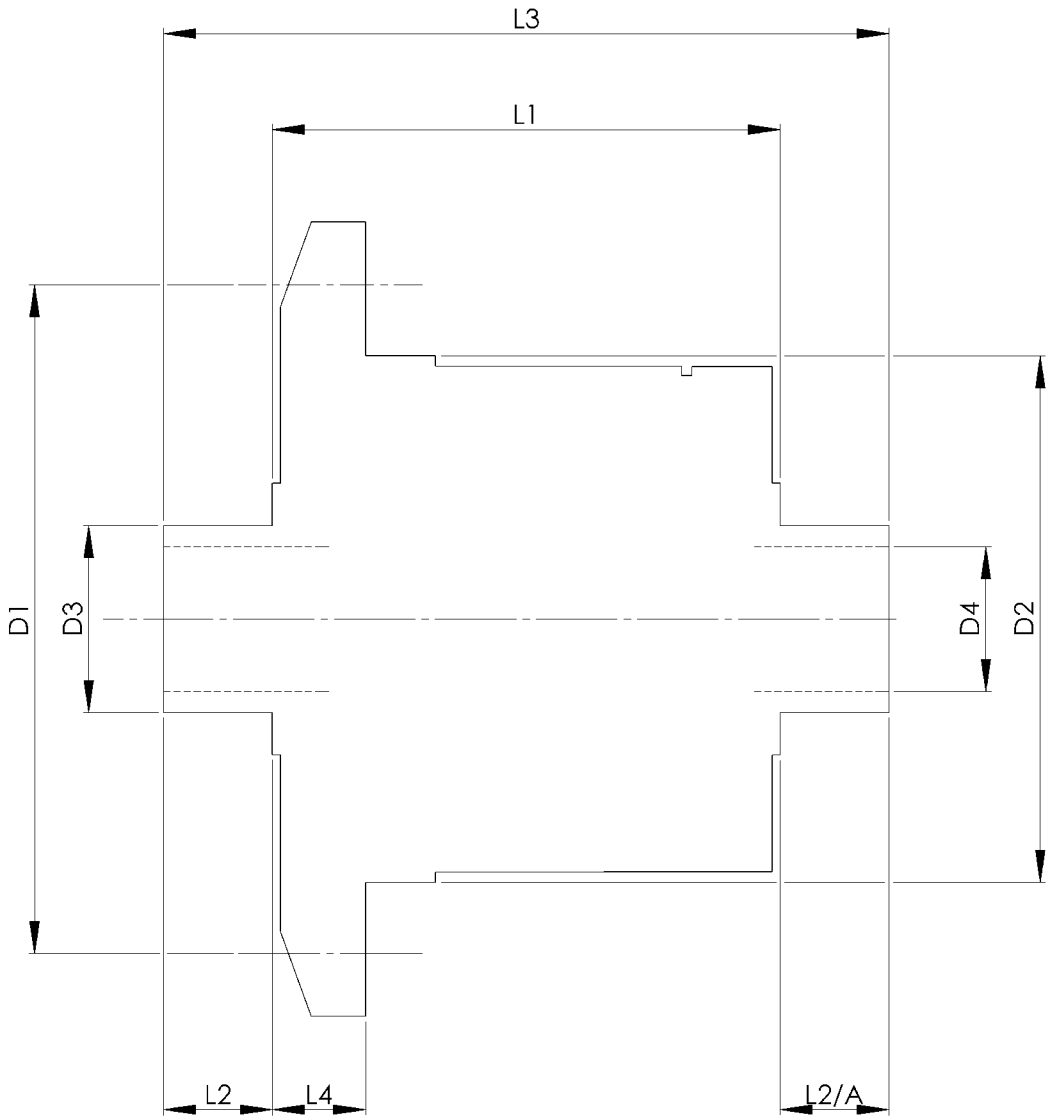

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	

TITLE R.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF7S

IF IN DOUBT, ASK.

Quaife Design & Development.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF KQ QUAIFE NORWICH LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

Used In. HEWLAND FT (Formula Atlantic) (with Alloy end cover)

A3(4)border

SOLID WORKS