


Drg No. QDF14H

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.626	117.5
No. OF BOLTS		8	
THREAD / THRO' HOLE		0.315	8
CROWN WHEEL SPIGOT DIA	D2	3.75	95.25
BEARING DIA	D3	1.378	35
	D3/A	1.251	38.1
BEARING DISTANCE	L1	4.543	115.4
SPIGOT LENGTH	L2	0.727	18.5
	L2/A	0.666	16.9
OVERALL LENGTH	L3	5.936	150.8
BEARING/CROWN WHEEL	L4	0.644	16.4
BORE	D4	0.986	25
DRIVE SHAFT SPLINE:-			
No. OF TEETH		10	
PITCH		1 NOM	
TYPE			

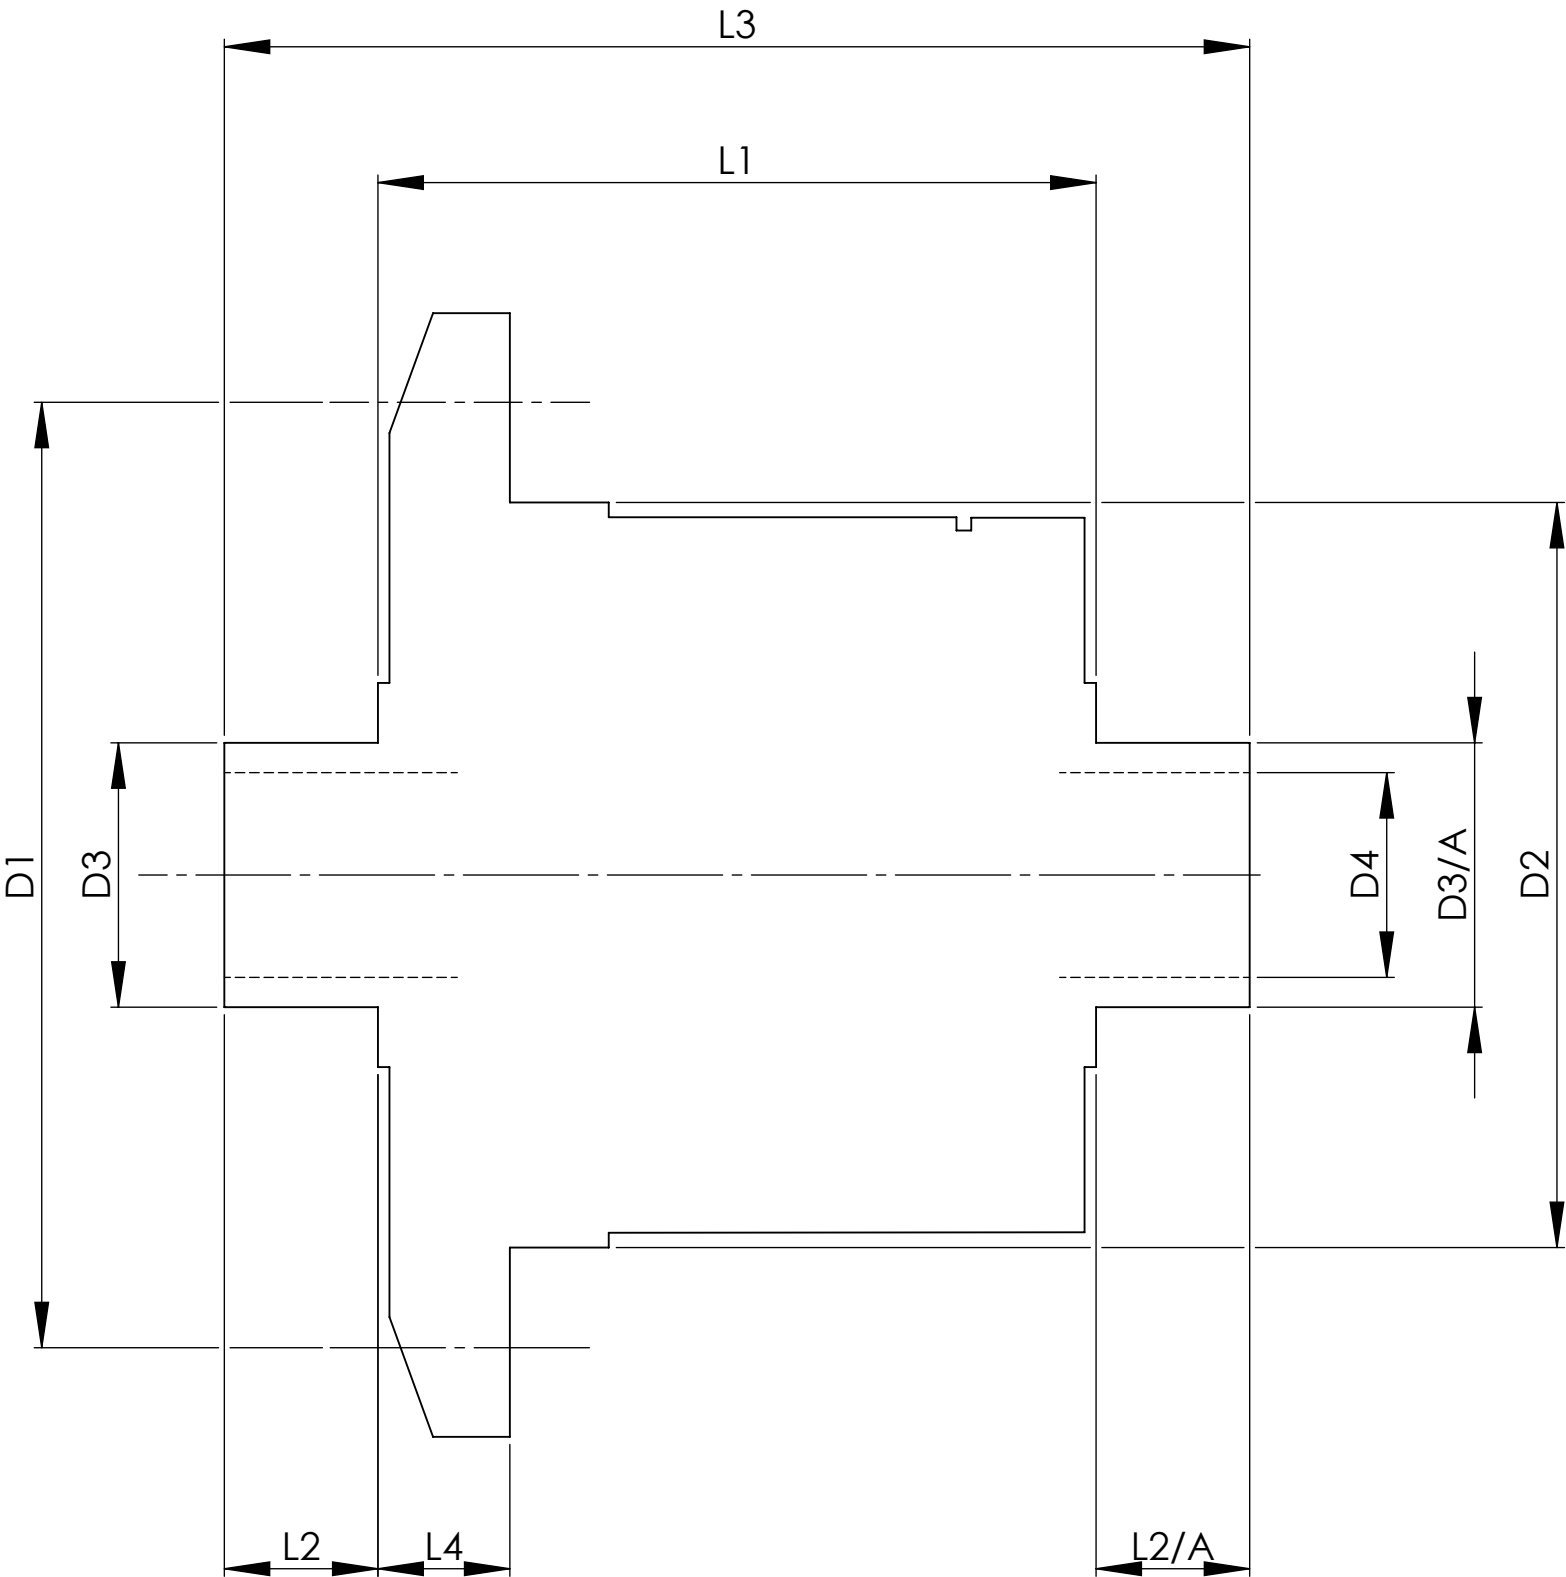

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF14H

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T. QUAIFFE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01	DATE. 27.2.08
DRAWN BY. H.R.	

Used In. HILLMAN IMP