
Drg No. QDF1H

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

| | | INCH | MM |
|---|---|---|---|
| CROWN WHEEL BOLT PCD | D1 | 4.750 | 120.7 |
| No. OF BOLTS | | 8 | 8 |
| THREAD / THRO' HOLE | | 0.391 | 9.9 |
| CROWN WHEEL SPIGOT DIA | D2 | 4.0312 | 102.4 |
| BEARING DIA | D3 | 1.3762 | 35.0 |
| BEARING DISTANCE | L1 | 3.871 | 98.3 |
| SPIGOT LENGTH | L2 | 0.812 | 20.6 |
| | L2/A | 0.800 | 20.3 |
| OVERALL LENGTH | L3 | 5.483 | 139.3 |
| BEARING/CROWN WHEEL | L4 | 0.687 | 17.4 |
| BORE | D4 | 1.022 | 26.0 |
| | | | |
| | | | |
| DRIVE SHAFT SPLINE:- | | | |
| No. OF TEETH | | 23 | |
| PITCH | | 24/48 DP | |
| TYPE | | FLAT ROOT | SIDE FIT |
| PRESSURE ANGLE | | 30 DEG | |
| | | | |

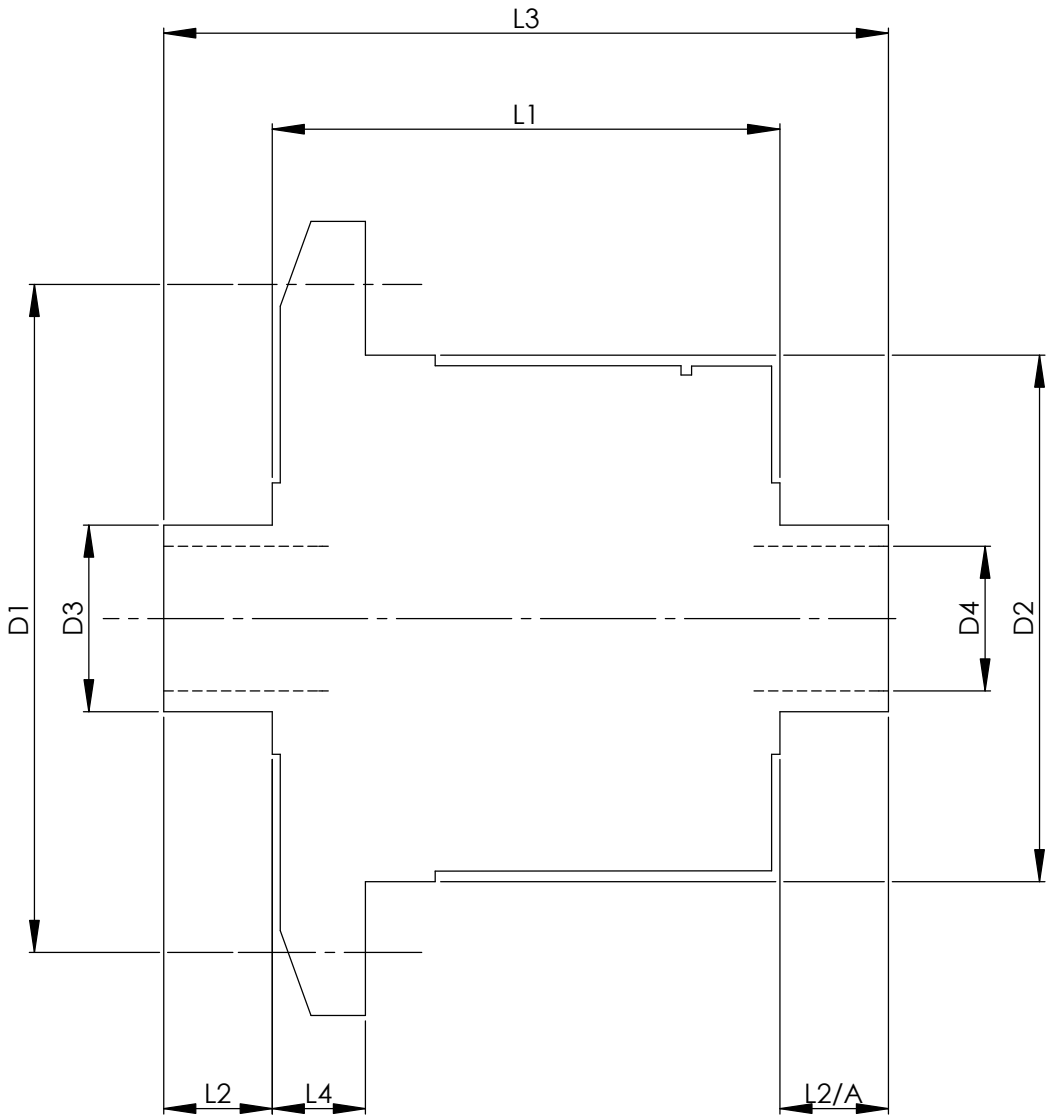


| |
|---|
| FINISH. MACH, GRIND@G |
| LIMITS. FRACT. ± 1/64". |
| DEC. ± 0.005". |
| MATERIAL. |
| TREATMENT. |
| ISSUE. 01 DATE. 20.5.05 |
| DRAWN BY. M.L.M. |

TITLE R.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

**Drg. No.** QDF1H

IF IN DOUBT, ASK.

**Quaife Design & Development.**

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF R.T.QUAIFE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

**Used In.** TALBOT SUNBEAM

A3(4)border

SOLID WORKS